


Specification

Nominal Voltage	12V	
Nominal Capacity(20HR)	10.0AH	
Dimensions	Length	151 ±2mm (5.95 inches)
	Width	65 ±1mm (2.56 inches)
	Container Height	111 ±2mm (4.37 inches)
	Total Height (with Terminal)	117 ±2mm (4.61 inches)
Approx Weight	Approx 3.20 kg (7.06lbs)	
Terminal	T2	
Container Material	ABS	
Rated Capacity	10.0 AH/0.50A	(20hr ,1.80V/cell,25 °C/77°F)
	9.30 AH/0.93A	(10hr,1.80V/cell,25 °C/77°F)
	8.50 AH/1.70A	(5hr,1.75V/cell,25 °C/77°F)
	7.65 AH/2.55A	(3hr,1.75V/cell,25 °C/77°F)
	6.28 AH/6.28A	(1hr,1.60V/cell,25 °C/77°F)
Max. Discharge Current	150A (5s)	
Internal Resistance	Approx 22m Ω	
Operating Temp.Range	Discharge : -15 ~50°C (5 ~122°F)	
	Charge : 0 ~40°C (32 ~104°F)	
	Storage : -15 ~40°C (5 ~104°F)	
Nominal Operating Temp. Range	25 ±3°C (77 ±5°F)	
Cycle Use	Initial Charging Currentless than 3.0A.Voltage 14.4V~15.0V at 25 °C (77 °F)Temp. Coefficient -30mV/ °C	
Standby Use	No limit on Initial Charging Current Voltage 13.5V~13.8V at 25 °C (77 °F)Temp. Coefficient -20mV/ °C	
Capacity affected by Temperature	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	LBS series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	



Applications

- ◆ All purpose
- ◆ Uninterruptable Power Supply(UPS)
- ◆ Electric Power System(EPS)
- ◆ Emergency backup power supply
- ◆ Emergency light
- ◆ Railway signal
- ◆ Aircraft signal
- ◆ Alarm and security system
- ◆ Electronic apparatus and equipment
- ◆ Communication power supply
- ◆ DC power supply
- ◆ Auto control system

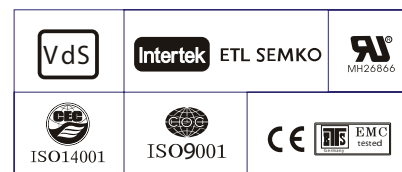

Constant Current Discharge (Amperes) at 25°C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	19.0	14.6	12.1	10.5	8.10	5.97	5.03	2.97	2.33	1.89	1.54	1.34	1.080	0.902	0.495
1.80V/cell	25.6	18.7	14.6	12.4	9.56	6.94	5.63	3.25	2.50	2.02	1.66	1.44	1.145	0.930	0.500
1.75V/cell	28.8	20.5	16.0	13.3	9.92	7.20	5.89	3.37	2.55	2.07	1.70	1.48	1.165	0.955	0.505
1.70V/cell	31.7	22.4	17.1	14.0	10.3	7.49	6.08	3.45	2.62	2.12	1.74	1.51	1.181	0.974	0.514
1.65V/cell	35.0	24.2	18.1	14.9	10.9	7.68	6.22	3.50	2.73	2.19	1.79	1.54	1.200	0.994	0.521
1.60V/cell	38.6	26.2	19.4	15.8	11.5	8.00	6.28	3.65	2.82	2.26	1.85	1.57	1.212	1.005	0.524




Constant Power Discharge (Watts /cell) at 25°C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	34.8	27.0	22.6	19.7	15.4	11.5	9.7	5.78	4.54	3.70	3.03	2.63	2.13	1.79	0.981
1.80V/cell	46.2	34.1	26.9	23.0	17.9	13.2	10.8	6.26	4.85	3.93	3.23	2.81	2.25	1.84	0.989
1.75V/cell	51.0	36.9	29.1	24.5	18.5	13.6	11.3	6.47	4.92	4.00	3.31	2.88	2.29	1.88	0.998
1.70V/cell	54.6	39.3	30.6	25.6	19.1	14.1	11.6	6.62	5.05	4.10	3.38	2.94	2.32	1.92	1.015
1.65V/cell	59.4	42.0	32.3	26.9	20.0	14.3	11.8	6.67	5.24	4.23	3.47	2.99	2.35	1.96	1.027
1.60V/cell	64.0	44.6	34.0	28.4	21.0	14.8	11.8	6.93	5.38	4.35	3.57	3.04	2.37	1.98	1.032


Dimensions

T2 Terminal


Unit: mm [inches]

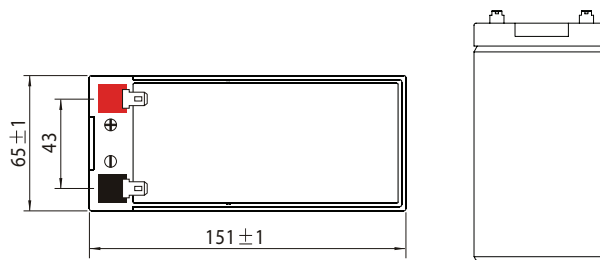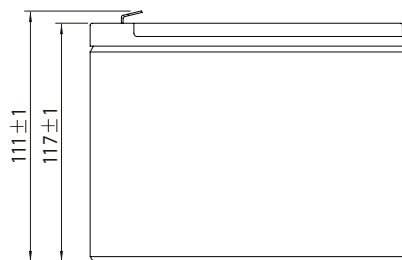


Discharge Characteristics

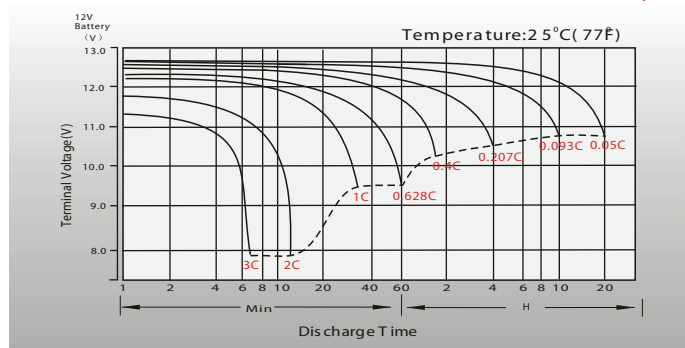


Float Charging Characteristics

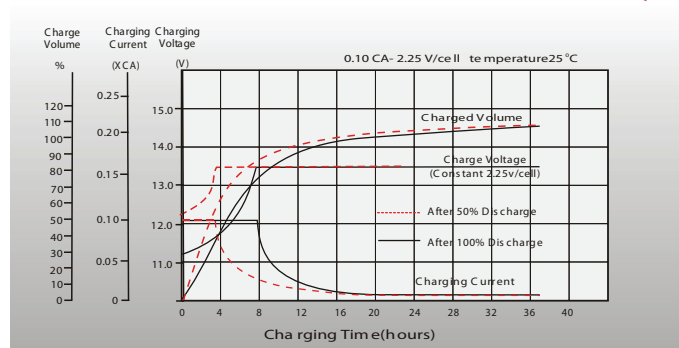


Temperature Effects in Relation to Battery Capacity

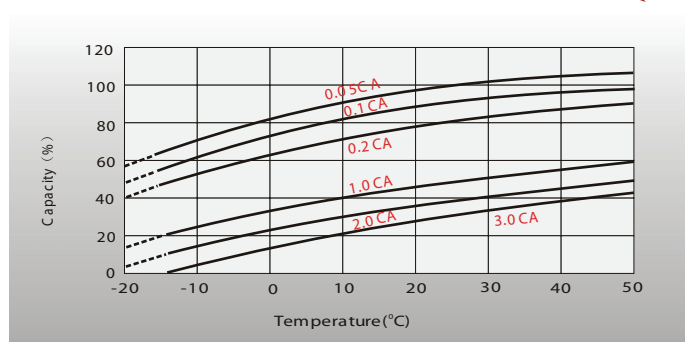


Effect of Temperature on Long Term Float Life

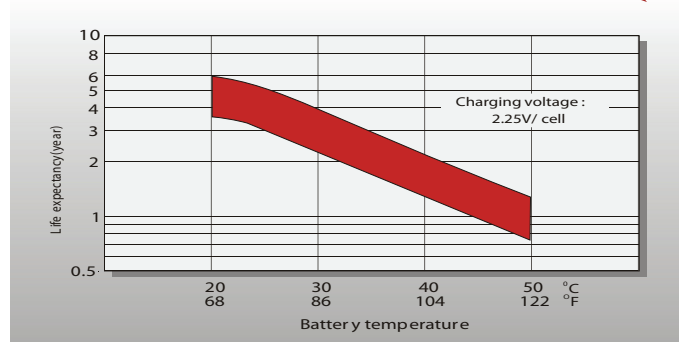

Cycle Life in Relation to Depth of Discharge

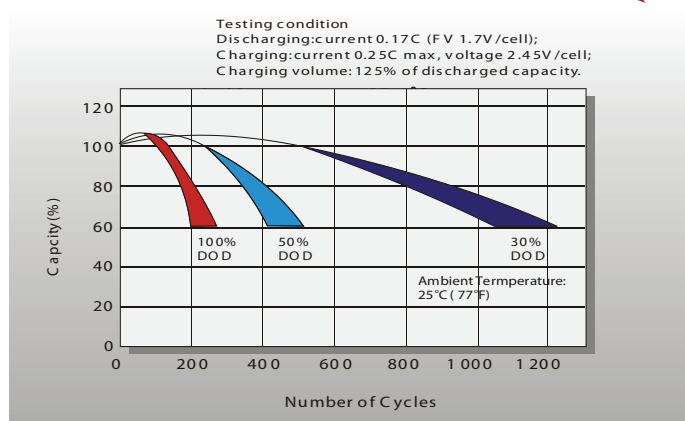

Self Discharge Characteristics

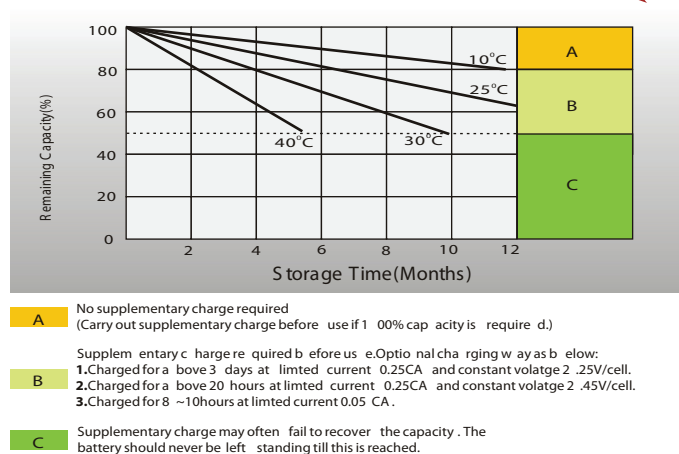

Sales Office

MÉXICO

Calzada de la Viga 918, Col. Santa Cruz
CP. 08910, Alcaldía Iztacalco, Ciudad de México
Tel: 54848417 / 55543644
www.lemonroy.com
ventas@lemonroy.com

USA

415 NW Flagler Avenue,
Suite 301, Stuart, FL 34994
Office: 772 444 3135
Toll Free: (844) 832-1142
www.lbspower.com
info@lbspower.com