

### Specification

Nominal Voltage	12V
Nominal Capacity(20HR)	8.6AH
Dimensions	Length 151±2mm (5.95 inches)
	Width 65±1mm (2.56 inches)
	Container Height 93.5±1mm (3.68 inches)
	Total Height (with Terminal) 99±1mm (3.90 inches)
Approx Weight	Approx 2.66 kg (5.87lbs)
Terminal	T2
Container Material	ABS
Rated Capacity	8.60 AH/0.430A (20hr,1.80V/cell,25 °C/77°F)
	7.86 AH/0.786A (10hr,1.80V/cell,25 °C/77°F)
	7.00 AH/1.40A (5hr,1.75V/cell,25 °C/77°F)
	6.36AH/2.12A (3hr,1.75V/cell,25 °C/77°F)
	5.84 AH/5.84A (1hr,1.60V/cell,25 °C/77°F)
Max. Discharge Current	129A (5s)
Internal Resistance	Approx 19m Ω
Operating Temp.Range	Discharge : -15~50°C (5 ~122°F)
	Charge : 0 ~40°C (32 ~104°F)
	Storage : -15~40°C (5 ~104°F)
Nominal Operating Temp. Range	25 ± 3°C (77 ± 5°F)
Cycle Use	Initial Charging Current less than 2.58A.Voltage 14.4V~15.0V at 25 °C (77 °F)Temp. C coefficient -30mV/°C
	Standby Use No limit on Initial Charging Current Voltage 13.5V~13.8V at 25 °C (77 °F)Temp. C coefficient -20mV / °C
Capacity affected by Temperature	40°C (104°F) 103%
	25°C (77°F) 100%
	0°C (32°F) 86%
Self Discharge	LBS series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter
	Self-discharge ratio less than 3% per month at 25 °C (77°F)



### Applications

- ◆ All purpose
- ◆ Uninterruptable Power Supply(UPS)
- ◆ Electric Power System(EPS)
- ◆ Emergency backup power supply
- ◆ Emergency light
- ◆ Railway signal
- ◆ Aircraft signal
- ◆ Alarm and security system
- ◆ Electronic apparatus and equipment
- ◆ Communication power supply
- ◆ DC power supply
- ◆ Auto control system

### Constant Current Discharge (Amperes) at 25°C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	28.0	18.7	14.7	12.2	9.06	6.57	5.13	2.80	2.00	1.58	1.32	1.14	0.913	0.764	0.417
1.80V/cell	31.5	20.5	15.9	12.9	9.46	6.81	5.32	2.89	2.06	1.62	1.36	1.18	0.941	0.786	0.430
1.75V/cell	34.6	21.6	16.9	13.6	9.83	7.05	5.50	2.98	2.12	1.68	1.40	1.21	0.979	0.807	0.432
1.70V/cell	36.8	22.8	17.6	14.0	10.2	7.28	5.64	3.07	2.18	1.72	1.44	1.24	0.988	0.822	0.438
1.65V/cell	38.5	23.6	18.2	14.5	10.5	7.44	5.74	3.12	2.22	1.76	1.47	1.26	1.01	0.830	0.440
1.60V/cell	39.7	24.5	18.5	14.8	10.7	7.57	5.84	3.17	2.25	1.78	1.49	1.28	1.02	0.838	0.443


### Constant Power Discharge (Watts) at 25°C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	51.8	34.9	27.6	23.0	17.2	12.6	9.90	5.42	3.89	3.09	2.59	2.24	1.80	1.51	0.827
1.80V/cell	57.3	37.7	29.5	24.2	17.8	13.0	10.2	5.57	4.00	3.15	2.65	2.31	1.85	1.55	0.851
1.75V/cell	62.1	39.3	31.0	25.2	18.4	13.3	10.5	5.73	4.09	3.25	2.73	2.38	1.92	1.59	0.854
1.70V/cell	65.2	41.0	32.0	25.8	19.0	13.7	10.7	5.88	4.21	3.34	2.80	2.43	1.94	1.62	0.863
1.65V/cell	67.0	41.7	32.6	26.4	19.4	13.9	10.9	5.96	4.27	3.40	2.85	2.46	1.97	1.63	0.868
1.60V/cell	68.1	42.8	32.9	26.7	19.6	14.0	11.0	6.02	4.30	3.42	2.87	2.49	1.98	1.64	0.872


## Dimensions

### T2 Terminal


Unit: mm

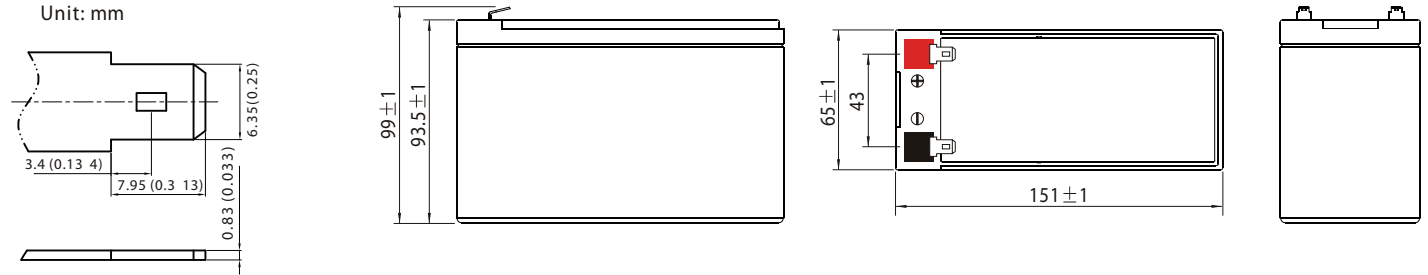


## Discharge Characteristics

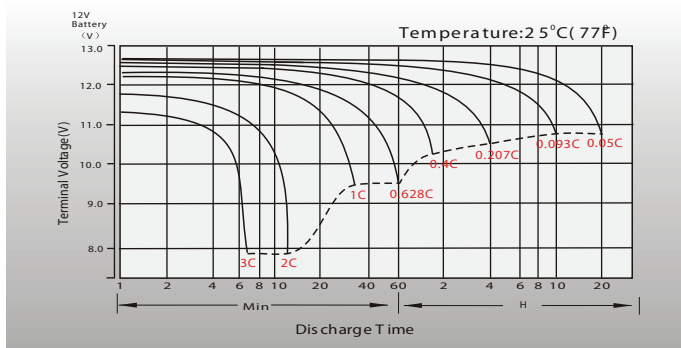


## Float Charging Characteristics

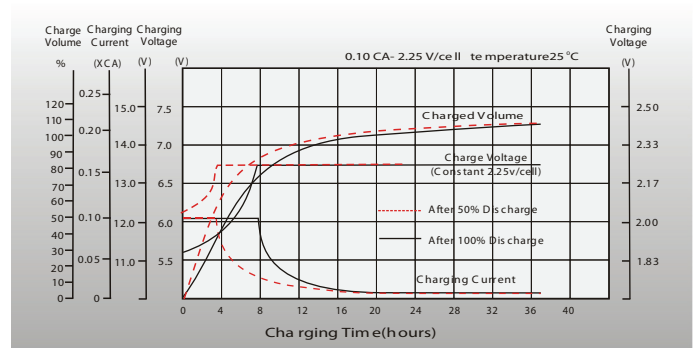


## Temperature Effects in Relation to Battery Capacity

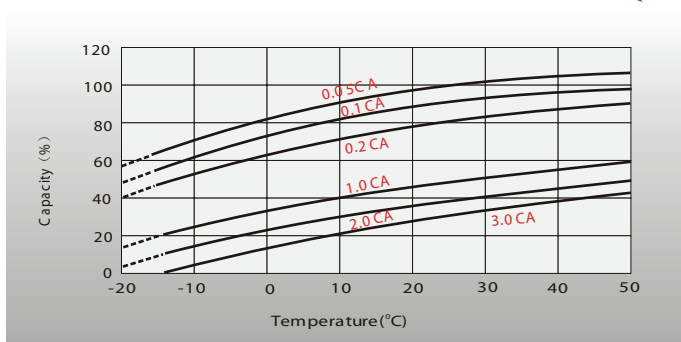


## Effect of Temperature on Long Term Float Life

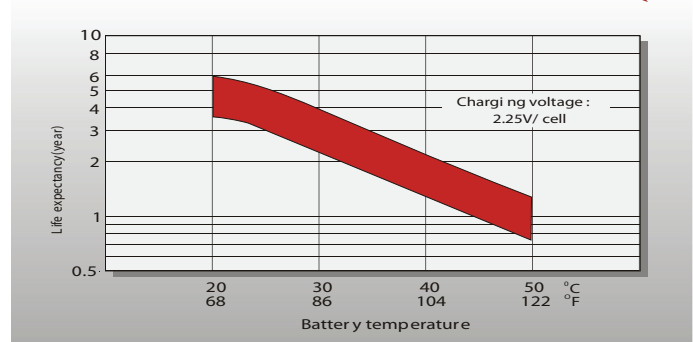

## Cycle Life in Relation to Depth of Discharge

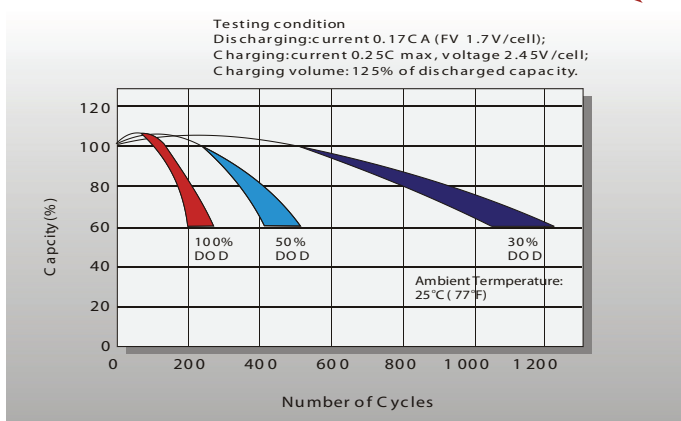

## Self Discharge Characteristics

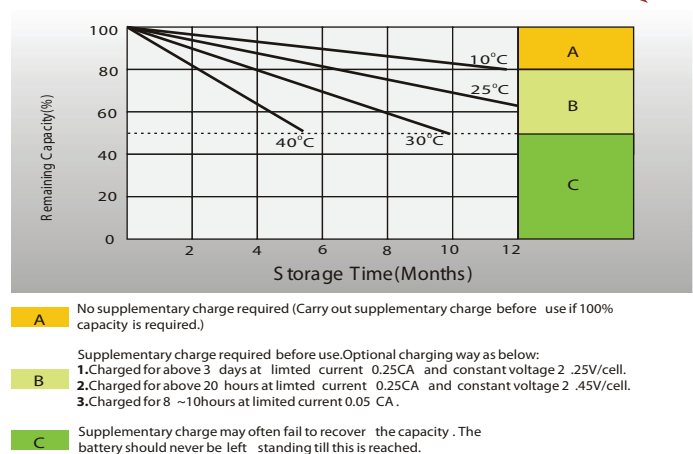

## Sales Office

### MÉXICO

Calzada de la Viga 918, Col. Santa Cruz  
 CP. 08910, Alcaldía Iztacalco, Ciudad de México  
 Tel: 54848417 / 55543644  
 www.lemonroy.com  
 ventas@lemonroy.com

### USA

415 NW Flagler Avenue,  
 Suite 301, Stuart, FL 34994  
 Office: 772 444 3135  
 Toll Free: (844) 832-1142  
 www.lbspower.com  
 info@lbspower.com